

1

2

3

5

6

7

Drawing name:

Version: A/0

1

2

3

5


6

7


Front view

Side view

Back view

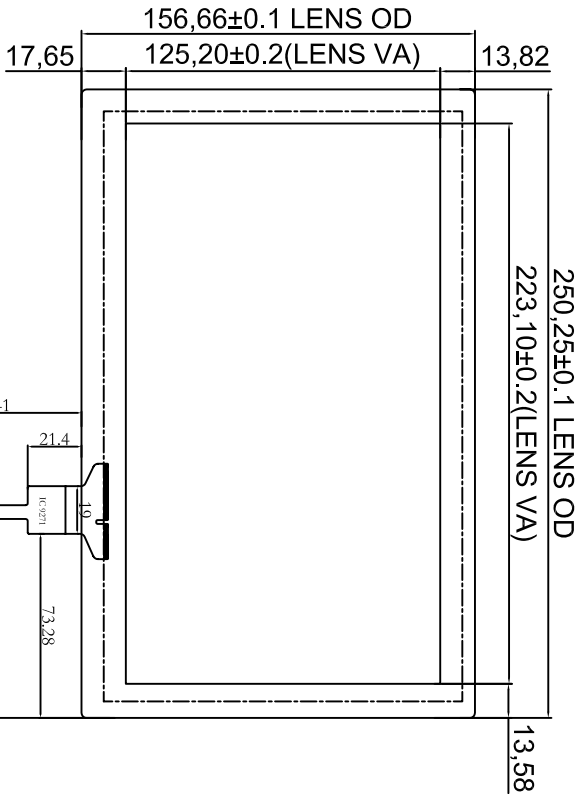

总厚度: 2.00±0.15 (不含背胶)
 LENS: 1.10
 LOCA: 0.20
 SENSOR: 0.70

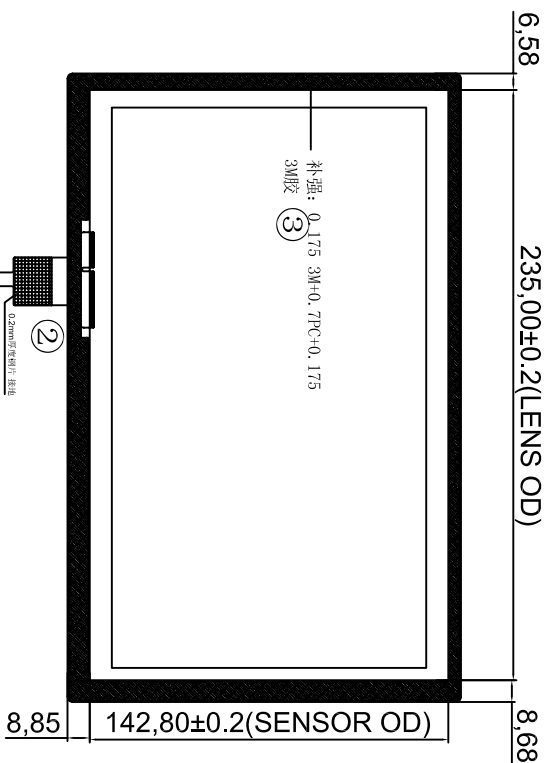

TP PIN Symbol

Pin	Symbol
1	GND
2	GND
3	RST
4	INT
5	GND
6	SCL
7	SDA
8	VDD
9	GND
10	GND

Technical parameters:

- 1. IC: GT9271
- Cover GLASS: 1.1mm
- OCA: 0.2mm
- ITO SENSOR: 0.7mm
- Lead line: FPC (PINCH=0.5mm)
- Total thickness: 2.0±0.15mm
- 2. Working voltage: 2.8-3.3V
- 3. Light transmittance: ≥82%
- 4. Surface hardness: 6H
- 5. Operating temperature: -20℃~+70℃, ≤90%RH
- 6. Storage temperature: -30℃~+80℃, ≤90%RH

Instructions:

- 1. Structure type: Glass+Glass.
- 2. Unmarked tolerance: ±0.20;
- 3. Comply with ROHS standards;

Item	Description	Date
V00	New design	2019/06/20
V01		

深圳市万天源光电有限公司
 Shenzhen Wanty Photoelectric Co., Ltd

Unmarked tolerance	3RD ANGLE PROJ
0.00-5.00	±0.1
5.00-10.00	±0.15

Customer ID	Document number	Revision	Date
	WTY101225A02		2019/02/20

Pin	Symbol	Unit	mm

1

2

3

5

6

7

1

2

3

5

6

7