



Drawing name:

Version: A /0

正视图

侧视图

背视图

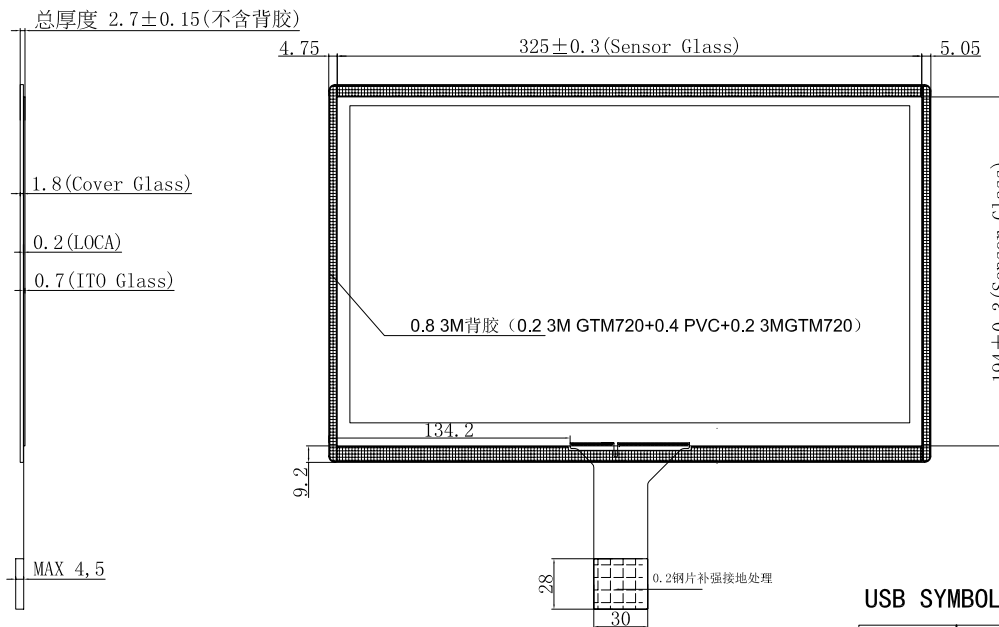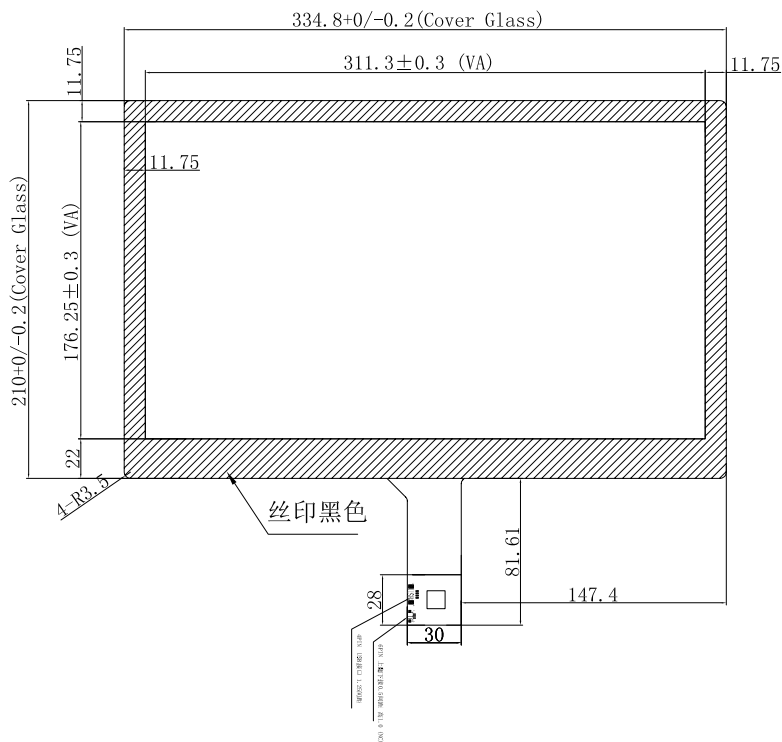

技术参数:

1. IC: ILI2511
Cover GLASS: 1.1mm
LOCA: 0.2mm
ITO SENSOR: 0.7mm
引线:FPC (PINCH=0.5mm)
总厚度: 2.7±0.15mm (不含背胶)
2. 工作电压: 5V
3. 透光率: ≥82%
4. 表面硬度: 6H
5. 工作环境: -20℃~+70℃, ≤90%RH
6. 储存环境: -30℃~+80℃, ≤90%RH

1. 结构类型: G+G结构.
2. 未标注公差 : ±0.20;
3. 符合ROHS标准;

USB SYMBOL

SYMBOL	PIN
1	GND
2	SDA
3	SCL
4	RST
5	INT
6	VDD3.3V

SYMBOL	PIN
1	VDD
2	D-
3	D+
4	GND

VER	Describe	Date
V00	New design	

Unmarked tolerance				3RD ANGLE PROJ
0.00-5.00	±0.1	>10	±0.20	
5.00-10.00	±0.15	Angle	±0.5°	

深圳市万天源光电有限公司  
Shenzhen Wanty Photoelectric Co., Ltd

Customer ID	80
Document number	WTY140B93A01
Data	
Proportion	1:1
Unit	mm