




Drawing name:

Version: A /0

Front view

Side view

Back view

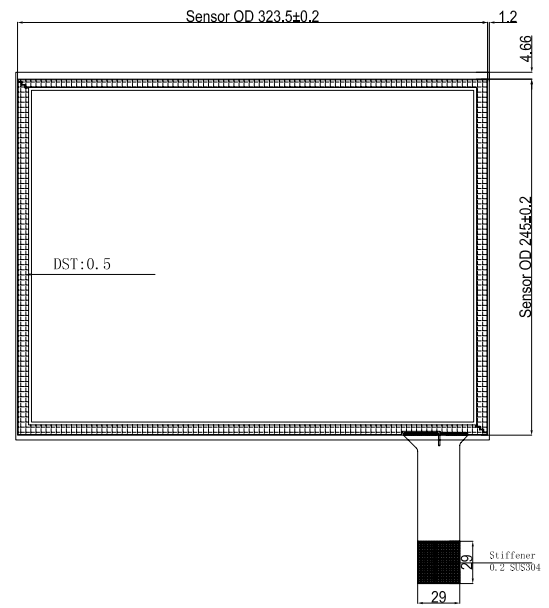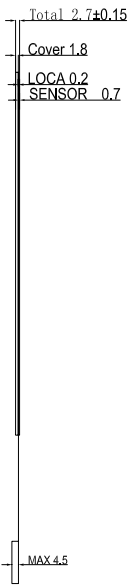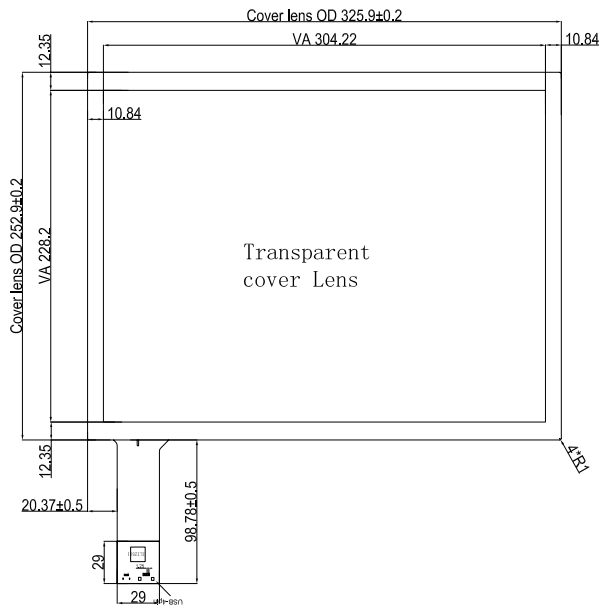

Technical parameters:

1. IC: ILI2511
- Cover GLASS: 1.8mm
- LOCA: 0.2mm
- ITO SENSOR: 0.7mm
- Lead line: FPC (PINCH=1.25mm)
- Total thickness: 2.7±0.15mm (Without DST)
2. USB Working voltage: 5V
3. Light transmittance: ≥82%
4. Surface hardness: 6H
5. Operating temperature: -20°C~+70°C, ≤90%RH
6. Storage temperature: -30°C~+85°C, ≤90%RH

Instructions:

1. Structure type: Glass+Glass.
2. Unmarked tolerance : ±0.20;
3. Comply with ROHS standards;

SYMBOL	PIN
1	VDD
2	D-
3	D+
4	GND

VER	Describe	Date
V00	New design	20200514
Unmarked tolerance		
0.00-5.00	±0.1	>10 ±0.20
5.00-10.00	±0.15	Angle ±0.5°

深圳市万天源光电有限公司 Shenzhen Wanty Photoelectric Co.,Ltd		Customer ID	
		Document number	WTY150C73A03
3RD ANGLE PROJN 			