




Drawing name:

Ver: A/0

Front view

Side view

Back view

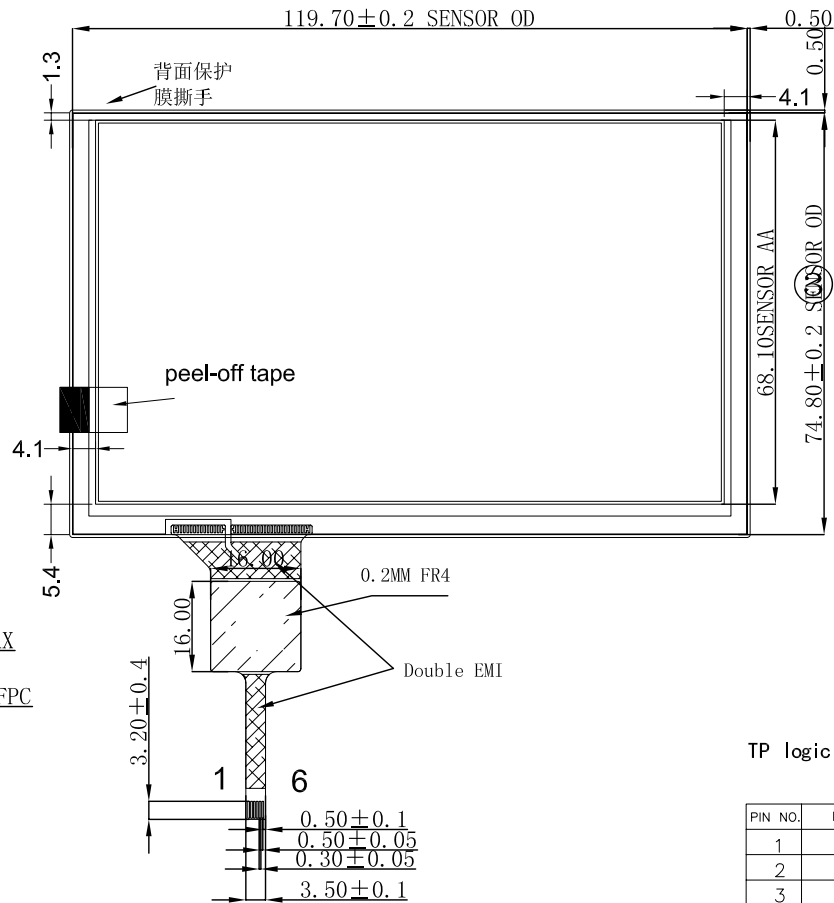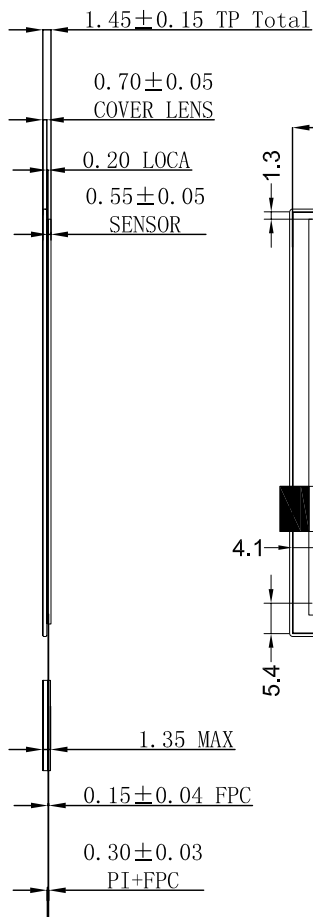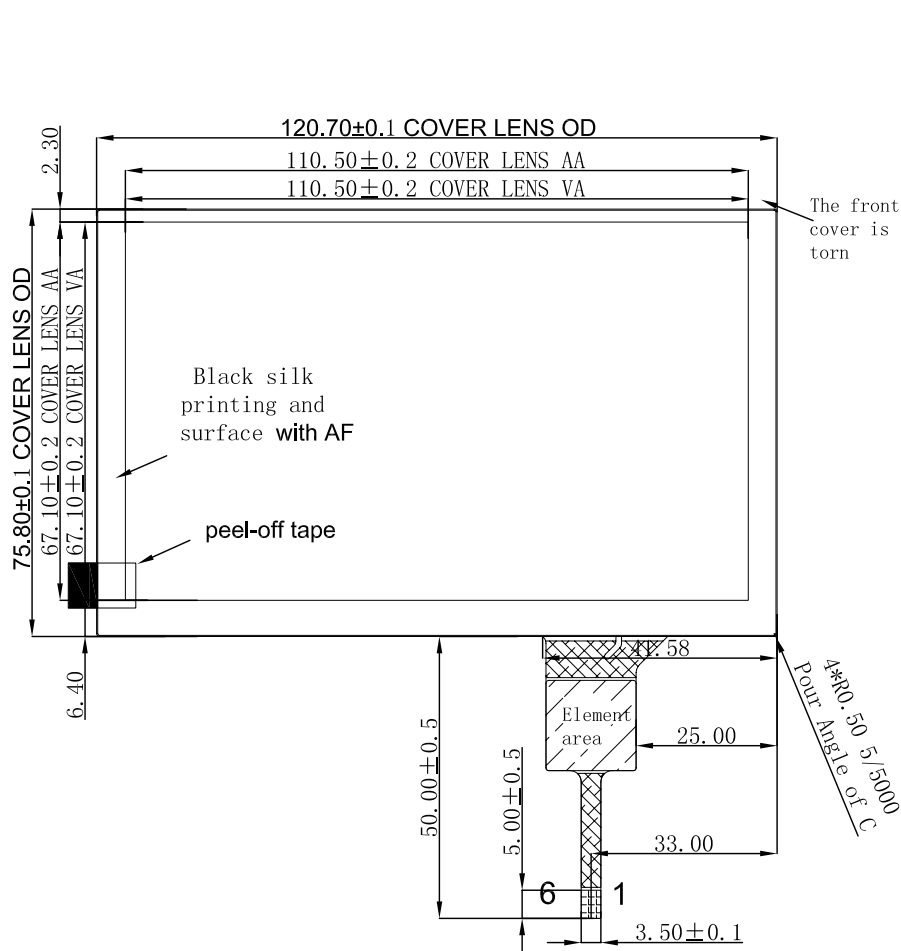

TP logic diagram

| PIN NO. | DINFINATION |
|---------|-------------|
| 1 | SDA |
| 2 | SCL |
| 3 | VDD |
| 4 | INT |
| 5 | RST |
| 6 | GND |

Technical parameters:

- IC: GT911
- Cover GLASS: 0.7mm
- OCA: 0.2mm
- ITO SENSOR: 0.55mm
- Lead line: FPC (PINCH=0.5mm)
- Total thickness: 1.45±0.15mm
- Working voltage: 2.8V
- Light transmittance: ≥82%
- Surface hardness: 6H
- Operating temperature: -20°C~+70°C, ≤90%RH
- Storage temperature: -30°C~+80°C, ≤90%RH

Instructions:

- Structure type: Glass+Glass.
- Unmarked tolerance : ±0.20;
- Comply with ROHS standards;

| Ver | Describe | Date |
|--------------------|----------|-------------|
| V00 | | 2018/08/11 |
| | | |
| | | |
| | | |
| | | |
| Unmarked tolerance | | |
| 0.00-5.00 | ±0.1 | >10 ±0.20 |
| 5.00-10.00 | ±0.15 | Angle ±0.5° |

| | | | |
|--|------------|-----------------|--------------|
| 深圳市万天源光电有限公司 WANTY Shenzhen Wany Photoelectric Co., Ltd | | Customer ID | 80 |
| | | Document number | WTY050667A01 |
| Date | 2018/08/11 | | |
| Proportion | 1:1 | Unit | mm |